


# Redwood integrated LED accent light with InfiLight

## SPECIFICATION SHEET

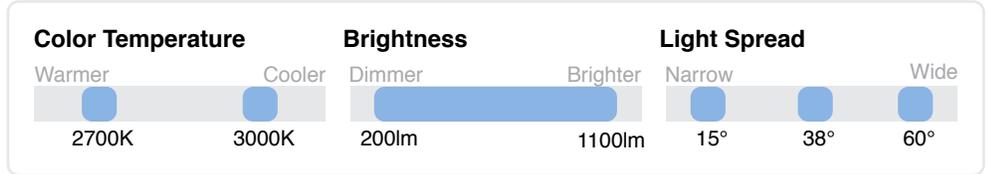

### Features

- Custom engineered driver and marine grade virgin brass housing
- InfiLight brightness adjustment from 200 to 1100 lumens
- Swappable optics to easily change beam spread
- EZClip connector for color temperature changing in seconds
- Independent LED and driver modules for easy maintenance
- Dual high temperature silicon o-rings between base and shroud
- Base arm features internal locking teeth, o-ring and dual plugs
- Can be converted to G6.35 (MR16) configuration in seconds
- Modern innovative design allowing for efficient thermal dissipation

### Dimensions and Images



### Product Specifications

<b>LED</b>	Brand Color Temperature Dimmable CRI Lumens Lumens per Watt	CREE 2700K or 3000K Yes, using the InfiLight adjustment 80+ 200-1100 with InfiLight adjustment 91.0
<b>Optics</b>	Light Spread External Lens Internal Optic	15°, 38° or 60° with changeable optics Convex Glass Polycarbonate
<b>Electrical</b>	Voltage Watts Lead Wire Working Temperature	12V 2W-12W 5 ft. 18 AWG SPT-1 wire with soldered shrink wrapped in-base connection -40°F to 219°F (-40°C to 104°C)
<b>Housing</b>	Material Angle Adjustment Color Ingress Protection Weather Protection	Marine grade virgin brass 45° to 120° using a stainless steel hex nut and internal locking teeth Perfect Bronze, powder coating available IP65   Dust tight and protected against projected water Three high temperature o-rings and two plugs
<b>Dimensions</b>	Diameter Length Weight	2.7 in. (69 mm) 6.0 in. (152 mm) 3.1 lbs (1.4 kg)
	Mounting Options Warranty Standards	Composite stake, 10 in. riser, 20 in. riser Lifetime on brass, 5 years for LED components ETL and cETL (pending)