

Type: _____

Model: _____

Project: _____

SPECIFICATION SHEET

MODEL: BB-02MK LED

SPECIFICATIONS

HOUSING:

Copper, Oxidized Bronze Finish Available

SOCKET/LAMP HOLDER:

One ceramic bi-pin socket with stainless steel spring.

LENS:

Clear tempered glass convex lens.

LAMP TYPE:

3-watt LED Slugger

MOUNTING:

Knuckle/stake base 8". Adjustable shield included

WIRING:

Prewired with 5' pigtail of 18/2 cable.



WARRANTY:

Lifetime.



Our "big stick" is used as an uplight where you would use an MR16 or a PAR fixture, but where space is limited. Its slim design allows landscape friendly installations in multiple landscape designs. Available in custom lengths for placement in high grasses.

DIMENSIONS:

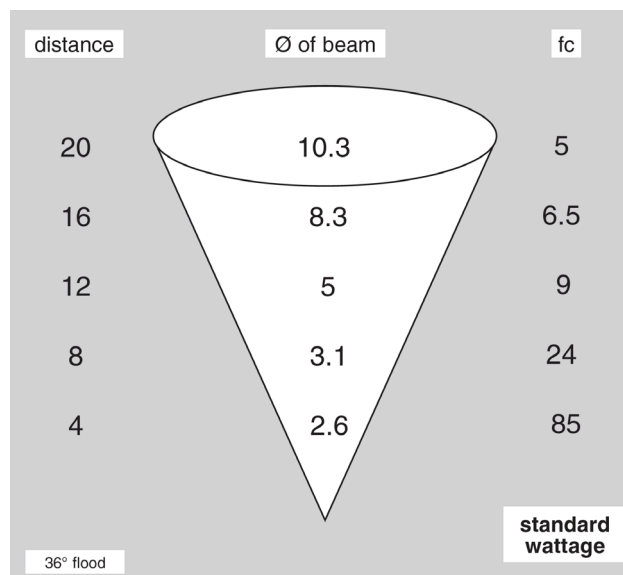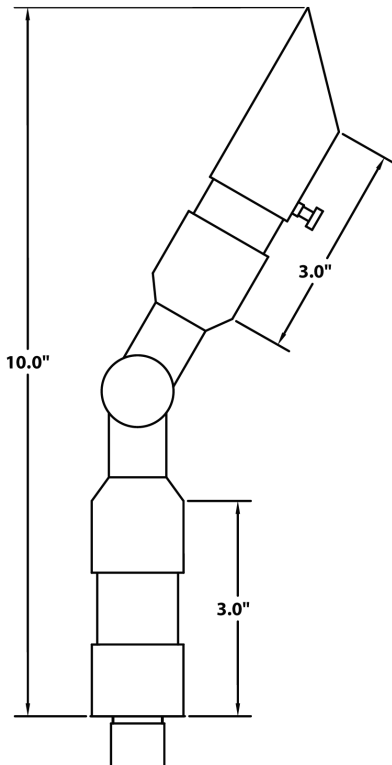

LED LAMP SPECIFICATIONS

LAMP TYPE:

MR16 UL-listed (E353116) 12V lamp with 5-year warranty, dimmable, and suitable for enclosed luminaires.

OPTICS:

Integral optics providing available beam spreads from 15° to 60°.

COLOR TEMPERATURES:

Color temperature options provide the following qualities: 2700K=ultra-warm; 3000K=warm white; 4000K=neutral white; 5000K=cool white. Decorative color light options include amber, blue, green, and red.



| FIXTURE | | LAMP | | MOUNTING | | RISER | |
|----------------|---------|-----------------------|-------------------------------|-----------------|-----------------------------------|------------|------------------------|
| BB-02MK LED | WATTAGE | BEAM SPREAD | COLOR TEMP. | MS | Composite stake (incl.) 490029 | R2 | 2" brass riser 490038 |
| | 2W | 25° / 40° / 60° | 2700K / 3000K | M3 | 3-prong tri-stake 490030 | R3 | 3" brass riser 490039 |
| | 4W | 25° / 40° / 60° | 2700K / 3000K | MY | Y-bracket surface mount 490045 | R6 | 6" brass riser 490031 |
| | 5W | 15° / 25° / 40° / 60° | 2700K / 3000K | MG | Brass gutter mount 490047 | R12 | 12" brass riser 490032 |
| | | | | MR | Round 3-hole surface mount 490048 | R24 | 24" brass riser 490033 |
| | 6W | 25° | Amber / Blue / Green / Red | MP | PVC mounting stake 490037 | | |
| | | | | 25° / 40° / 60° | 2700K / 3000K | | |
| | 7W | 25° / 40° | 2700K / 3000K / 4000K / 5000K | | | | |
| 60° | | | | 2700K / 3000K | | | |